



BS-(600-620)TRG-132HC

MODULE SIZE

2382*1134*30mm

POWER OUTPUT RANGE

600W - 620W

POSITIVE POWER TOLERANCE

0 - + 3%

N-TOPCON MONOCRYSTALLINE MODULE



132 CELL

MAXIMUM EFFICIENCY

22.95%

LINEAR PERFORMANCE WARRANTY

**15 Year Product Warranty
30 Year Linear Power Warranty**

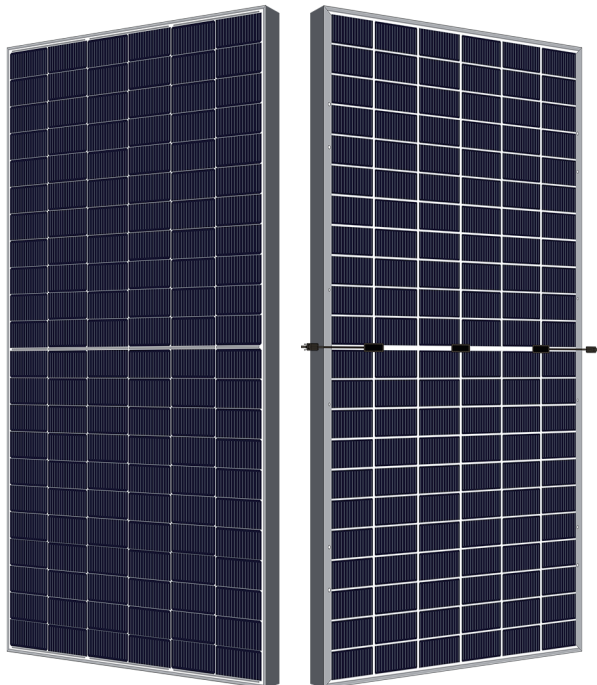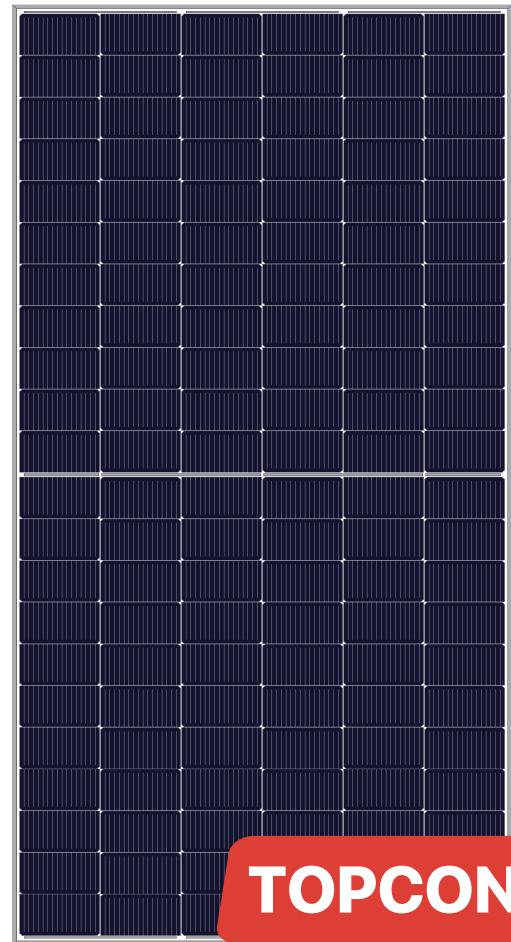

Competitive Low Light
Performance



Reduced Power Loss by
Minimising the Effect of
Shadow Shading



High Density
Encapsulation



Multi-Busbar
Technology



2400pa Wind Load
5400pa Snow Load



Reduced BOS &
Increased ROI


**BRIGHT
SOLAR**

www.brightsolar.cn

Add: No. 9 Qilin Bay, Yangshan Town, Wuxi, China

Tel: 0086 17715810958

E-mail: info@brightsolar.cn

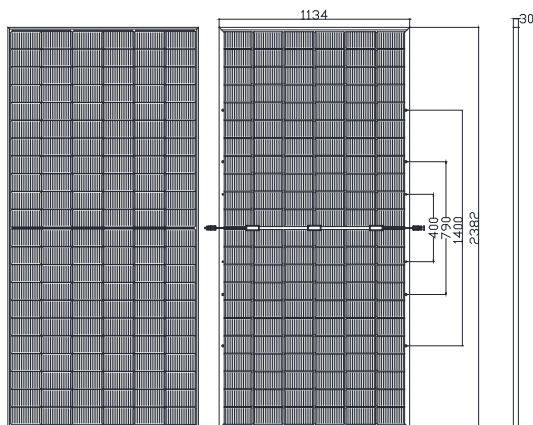DIMENSIONS OF PV MODULE**STRUCTURAL CHARACTERISTICS**

Module Size	2382x1134x30mm
Weight	33.7kg
Cell	single crystal N-topcon 182x105mm(132pieces)
Glass	2.0mm / 2.0mm
Frame	anodized aluminum alloy
Junction Box	IP68, 3 diodes
Output Lead	4.0mm ² 300mm(+)/ 300mm(-) or customized
Mechanical Load	front 5400pa / back 2400pa

ELECTRICAL CHARACTERISTICS

Component Model	TD-600TRG-132HC	TD-605TRG-132HC	TD-610TRG-132HC	TD-615TRG-132HC	TD-620TRG-132HC
Maximum Power (PMP)	STC 600	STC 605	STC 610	STC 615	STC 620
Open Circuit Voltage (VOC)	48.28	48.48	48.68	48.88	49.08
Short Circuit Current (ISC)	15.84	15.90	15.96	16.02	16.08
Maximum Power Voltage (VMP)	40.16	40.31	40.46	40.60	40.74
Maximum Power Current (IMP)	14.94	15.01	15.08	15.15	15.22
Component Efficiency (η)	22.21	22.40	22.58	22.77	22.95
Power Tolerance	(0, +3%)				
Maximum System Voltage	1500V DC				
Maximum Rated Fuse Current	35A				

STC: Irradiance 1000 W/m² module temperature 25 °C AM=1.5

TEMPERATURE CHARACTERISTICS

Maximum Power Temperature Coefficient	-0.30 % / °C
Temperature Coefficient Of Open Circuit Voltage	-0.25 % / °C
Temperature Coefficient Of Short Circuit Current	+0.045 % / °C
Working Temperature	-40 ~ +85 °C
Nominal Operating Cell Temperature (NOCT)	45 ± 2 °C
Bifacial-Factor	80% ± 5%

PACKING METHOD

Module Size	2382x1134x30mm
Container	40' HQ
Quantity Per Pallet	36
Number Of Pallets Per Container	20
Quantity Per Container	720

I-V Curve